


## Peel-off Module Quick Installation Guide (Option)


1. Turn the printer upside down and use the Phillips screwdriver to remove the 6 screws. Remove the lower cover.




2. Open the top cover and pull up the front panel from the printer. Thread the 5-pin peel-off module harness through the front slot of lower inner cover.

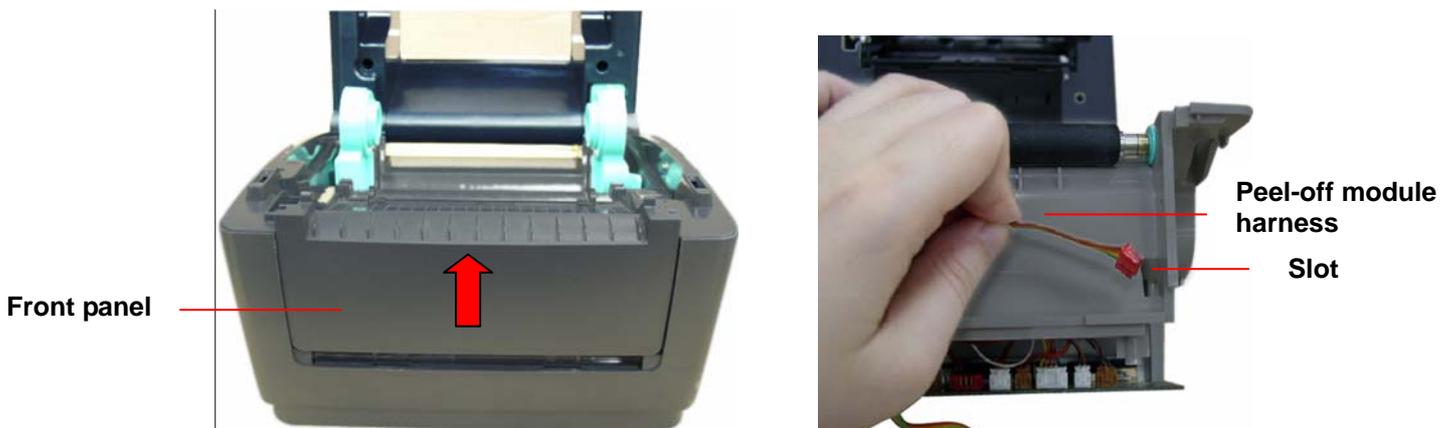

3. Plug in the peel-off module harness connector to the 5-pin red socket on the main board.

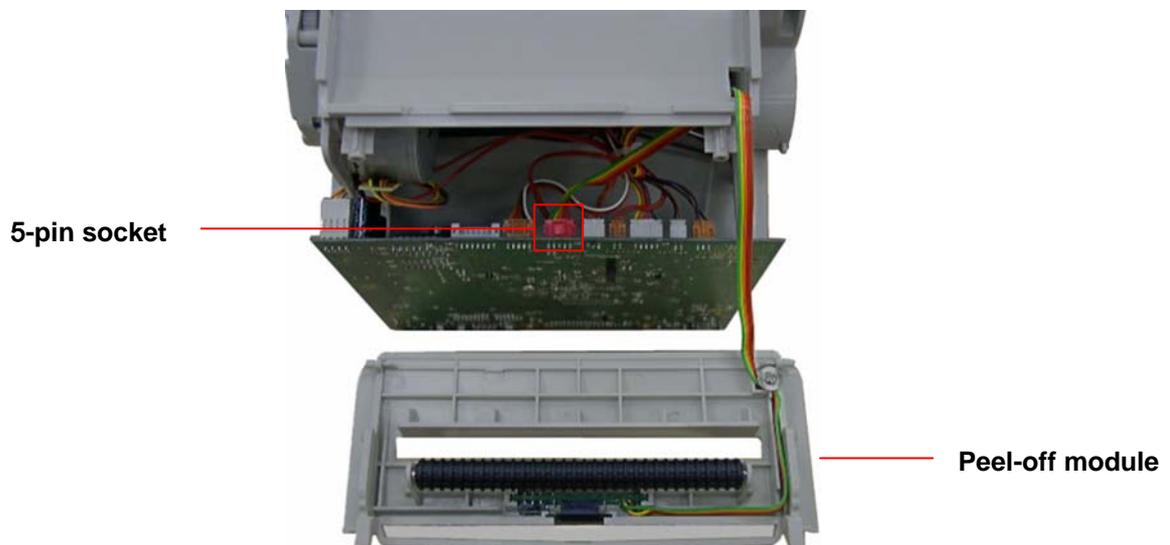

4. Embed the tenons into the both sides mortise of lower inner cover and close the peel-off cover.

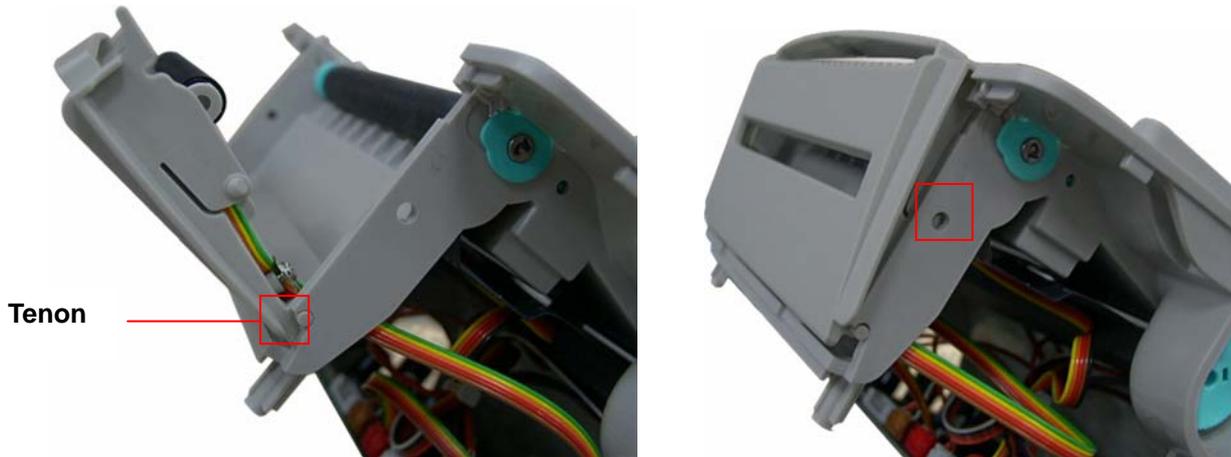


5. Then, put back the lower inner cover.

6. Close the top cover and then upside down the printer.

7. Fasten the 6 screws at the lower inner cover.

8. Open the peel-off cover. Disengage one of platen holder tab from lower inner cover and rotate the tab 90 degrees to install the peel-off bar into the both slots. Then, rotate the tab 90 degrees to engage the platen holder tab to the lower inner cover.

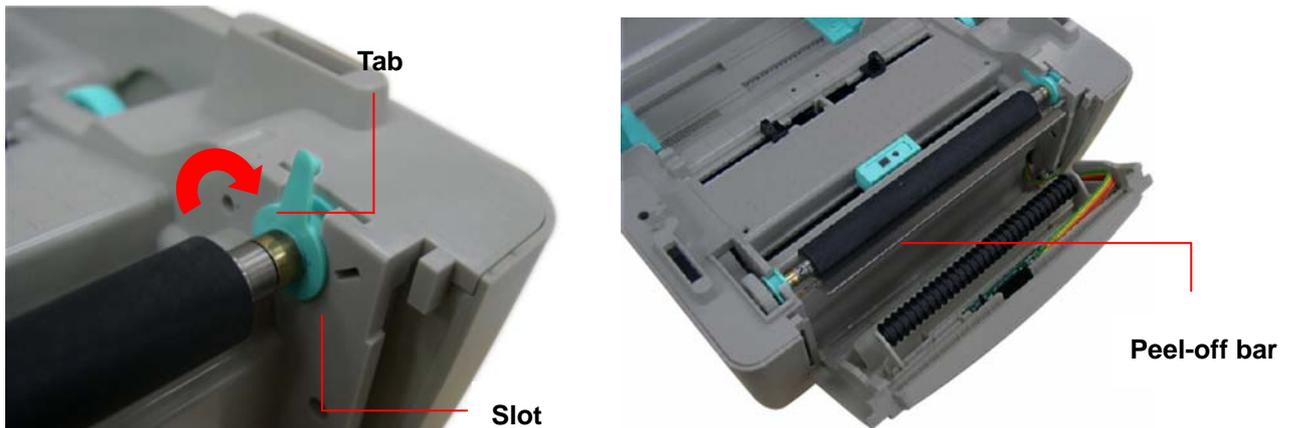

9. Place the printer in the flat and secured desktop for media loading and printing.

